

# Violetta Solargear VS12-B115LAM-300 Battery Compartment

## Operating Instructions

Thank you very much for purchasing our product. Please read this manual thoroughly before using this product, and retain it for future reference in order to use the product safely, and to make the most of its features. If you use other products together with this product, please read the operating instructions of those products thoroughly before use as well.

### Product Summary

A deep cycle battery compartment for dust and waterproof mobile PV systems designed for powering a broad range of appliances. Composed of a combination of an ultra-thin, light and efficient solar panel and a compact, lightweight yet weather resistant battery compartment for versatility, expandability, portability, weather resistance and durability at low cost in disaster prevention, business, leisure and everyday living.

### Applications

Charging the built-in deep cycle battery by sunlight, and powering a broad range of appliances through AC100V pure sine wave (inverter outlet, dust and water proof connectors) or DC12V (charge controller terminals, dust and water proof connectors) output. A built-in nightlight function can control DC12V load such as LED light at night.

### Features

- An IP67 dust and water proof Pelican Case with a fail-safe automatic pressure equalization valve as the battery compartment. Equipped with a retractable extension handle and strong polyurethane wheels with stainless steel bearings.
- A built-in 12V 115Ah deep cycle battery offers maintenance free and long life.
- A built-in Denryo SA-BC20 charge controller with a nightlight function and with only 2mA of self-consumption current to protect the uncharged battery from over-discharging.
- A silent and power saving Denryo GD300NA-112 300W pure sine wave DC-AC inverter with an AC100V outlet and AC100V connectors.
- IP68 dust and water proof connectors mating with solar panels, Extension Cables, AC100V Output Cables, DC12V Output Cables and DC Power Cables for weather resistant outdoor installations.
- Dust and water proof power supply to appliances with AC100V input with AC100V Output Cables.
- Dust and water proof power supply to appliances with DC12V input with DC12V Output Cables (sold separately).
- DC Power Cables (sold separately) to double the output capacity of the batteries.

### Important Safety Instructions

**Caution** Please follow the instructions below. Failure to comply may damage this device, cause the built-in battery to burst or result in leakage, fire and injury.

- Charge only the specified batteries.
- Do not allow metal objects to touch the input/output connectors.
- Do not block the automatic pressure equalization valve on the battery compartment.
- Do not short circuit, or disassemble this device.
- Do not put this device into water.
- Do not use or leave this device near fire.
- Do not use or leave this device in enclosed spaces.
- Do not use or leave this device in unstable high places.
- Stop charging in case of leakage from the battery.
- Stop charging in case the battery becomes unusually hot.

### Important Note

We are not responsible for any physical damage to appliances, any loss of memorized data, any interruption of business, and any loss of business opportunities caused by this product.

### Specifications

- Built-in battery: AC DELCO M31MF deep cycle battery
- Nominal capacity\*: 1380Wh (12V 115Ah)
- Max output: 300W (AC100V)
- 20A (DC12V charge controller terminals)
- 17A (DC12V dust and water proof connectors)
- Operating temperature (charge)\*\*: -10 - 50°C
- Operating temperature (discharge)\*\*: -10 - 40°C (AC100V inverter outlet)
- -15 - 60°C (DC12V charge controller terminals)
- -15 - 60°C (DC12V dust and water proof connectors)
- Dimensions (WxDxH): 500X305X457mm
- Weight: approx. 35.0kg (incl. accessories)
- Input/output terminals: IP68 dust and water proof connector X 1
- Output terminals: IP68 dust and water proof connector X 1
- AC100V inverter outlet X 1
- DC12V charge controller terminals X 1
- Safety features: Denryo SA-BC20 charge controller
- 20A fuse for short circuit prevention X 2
- Accessories: Denryo GD300NA-112 300W pure sine wave DC-AC inverter
- 5m dust and water proof jacket cable for AC100V output

\*0.2C rate at 25°C 80% DOD \*\*No freezing

### Feature Diagram



### How to Use

#### Connecting the solar panel/AC battery charger

- 1 Connect the output cables of the solar panel or AC battery charger to this product. Screw anticlockwise the cover off one of the dust and water proof connectors. Align the ▲ marks of both connectors and screw the ring clockwise tightly by hand.

⚠ **Note:** Pull the connectors lightly to make sure they are locked.




#### Charging the built-in Battery



- 1 Face the solar panel towards the sunlight, and charge the built-in battery. To mount the solar panel on the fence or on the ground, s-hooks, fixing ties or fixing pegs can be used. For the most efficient charging, adjust the direction and angle of the solar panel 90 degrees in opposition to the sun rays. Use the AC battery charger in the night and in bad weather.

#### Powering Appliances

- 1 To power appliances with AC100V input indoors, turn on the provided DC-AC inverter, and connect the plug of the appliances to the outlet of the inverter. To power appliances with AC100V input outdoors, connect the AC100V Output Cable to the dust and water proof connector on the right, and the processed end to the appliances.

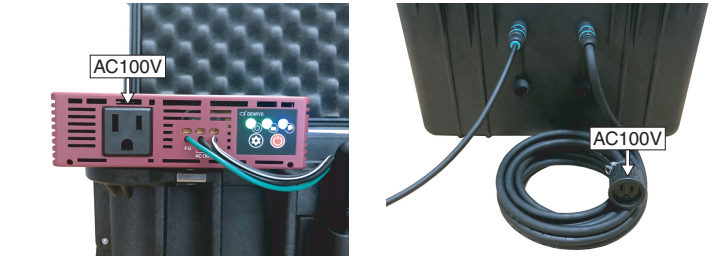

- 2 To power appliances with DC12V input outdoors, connect the DC12V Output Cable (sold separately) to the dust and water proof connector on the right, and the processed end to the appliances. To power appliances with the programmable nightlight function of the charge controller effective, disconnect cables from the battery terminals, and connect them to the DC12V load terminals of the built-in charge controller instead.

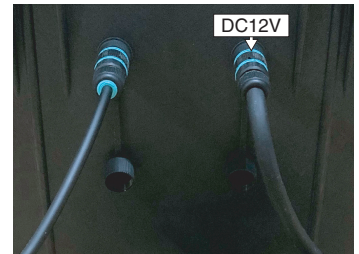

- 3 To monitor the status of the solar panel and the battery, refer to the LCD Display of the monitoring screen or to the LED indicators of the charge controller or DC-AC inverter. Please refer to the instruction manual of each component for details.
- 4 After you have finished powering appliances with AC100V input, turn off the provided DC-AC inverter, and disconnect the appliances from the outlet of the inverter or from the dust and water proof connector. After you have finished powering appliances with DC12V input, disconnect the appliances from the dust and water proof connector.
- 5 Once you have finished powering appliances, press the Power button on the monitoring screen for 3 seconds to put the battery into shelf mode to protect the built-in battery from over-discharging. To keep away from dust and water, and to avoid short circuit, close the lid of the battery compartment and cover the dust and water proof connectors.
- 6 You can connect another battery compartment with DC Power Cables to double the output capacity to power appliances with power consumption up to 200W.

### Maintenance

- To protect the built-in battery from over-discharging, charge it immediately when the charge controller indicates low voltage (yellow LED), or charge it at least every 6 month.
- The life of the built-in battery varies widely depending on the operating environment. Replace the battery when the operating time becomes notably short.
- Clean this product with a dried or dampened cloth. Do not use oil, solvents, petrol or paint thinners for cleaning.

### Warranty

- 1 year from the date of purchase

### STUDIO DEL SOLE INC.

1-101, City Court Meguro, 2-10-34, Kamiosaki, Shinagawa-ku, Tokyo 141-0021, Japan.  
Tel: +81-3-5423-6801 Fax: +81-3-5423-6802 E-mail: support@violetta.com

[www.violetta.com](http://www.violetta.com)

Design and specifications are subject to change without notice.

Assembled in Japan 01-03-22